

Installation Instructions - For Wall Mounted Sconces


CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture.

Parts:

- A-** Knurled Nut
- B-** Ceramic Fixture
- C-** Brass Washer
- D-** Rubber Washer
- E-** Nipple
- F-** Green Ground Screw
- G-** Box Machine Screws
- H-** Crossbar
- I-** Black Wire
- J-** Ground Wire
- K-** White Wire

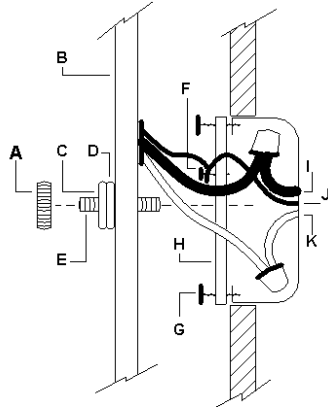

This illustration represents a typical fixture and may not match every style.

To Install

1. Turn off power at the main breaker box prior to starting installation.
 2. Using two box machine screws (**G**) and fasten the crossbar (**H**) to the electric box.
 3. Thread the nipple (**E**) into the crossbar.
 4. Using suitable wire connectors (not provided) connect the fixture wires to supply wires—white to white (**K**) and black to black (**I**). Connect ground wires (**J**) to crossbar ground screw (**F**).
- Caution: Make sure wire connectors are secure, and no bare wire is exposed.
5. Place the ceramic fixture (**B**) over the box so that the threaded nipple protrudes through the mounting hole in the fixture.
 6. Place the rubber washer (**D**) then brass washer (**C**) over the nipple and fasten securely with knurled nut (**A**). Do not over tighten or ceramic may crack.
 7. Install light bulb(s).
 8. Restore electricity at main breaker.

If you need further assistance, please contact the dealer from which you purchased this product. We appreciated your business and hope you enjoy your handmade lighting fixture.

Installation Instructions - For Wall Mounted Sconces


CAUTION: FAILURE TO INSTALL THIS FIXTURE PROPERLY MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH AND PROPERTY DAMAGE. We recommend installation by a licensed electrician.

This product must be installed in accordance with applicable installation code(s), by a person familiar with the construction and operation of the product and the hazards involved.*

Caution: Do not exceed maximum wattage noted on fixture.

Parts:

- A-** Knurled Nut
- B-** Ceramic Fixture
- C-** Brass Washer
- D-** Rubber Washer
- E-** Nipple
- F-** Green Ground Screw
- G-** Box Machine Screws
- H-** Crossbar
- I-** Black Wire
- J-** Ground Wire
- K-** White Wire

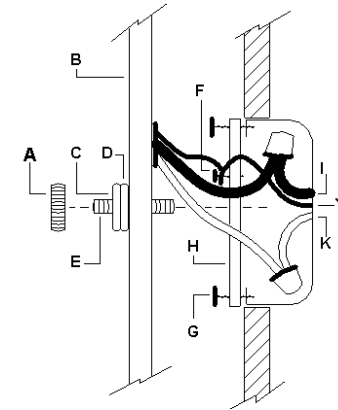

This illustration represents a typical fixture and may not match every style.

To Install

1. Turn off power at the main breaker box prior to starting installation.
 2. Using two machine screws (**G**) and fasten the crossbar (**H**) to the electric box.
 3. Thread the nipple (**E**) into the crossbar.
 4. Using suitable wire connectors (not provided) connect the fixture wires to supply wires—white to white (**K**) and black to black (**I**). Connect ground wires (**J**) to crossbar ground screw (**F**).
- Caution: Make sure wire connectors are secure, and no bare wire is exposed.
5. Place the ceramic fixture (**B**) over the box so that the threaded nipple protrudes through the mounting hole in the fixture.
 6. Place the rubber (**D**) washer then brass washer (**C**) over the nipple and fasten securely with knurled nut (**A**). Do not over tighten or ceramic may crack.
 7. Install light bulb(s).
 8. Restore electricity at main breaker.

If you need further assistance, please contact the dealer from which you purchased this product. We appreciated your business and hope you enjoy your handmade lighting fixture.